

# BRUCE 布鲁斯

400-8890-100  
www.chinabruce.cn



# BRUCE 布鲁斯

怕跳针 · 怕断线 · 就用布鲁斯

台州市布鲁斯缝制设备有限公司  
TaiZhou Bruce Sewing Machine Co.,Ltd.

浙江省台州市椒江区东海大道东段1008号2号楼  
No.2 building No.1008 Eastern Section East Sea Road Jiaojiang  
District Taizhou, Zhejiang.

2019.09

严谨  
RIGOROUS

稳定

稳重  
STEADY

STABLE

严谨  
RIGOROUS

细节

简洁  
CONCISION

怕跳针

怕断线

稳定  
STABLE

细节  
DETAIL-ORIENTED

严谨  
RIGOROUS

严谨  
RIGOROUS

稳定  
STABLE

稳重  
STEADY

细节  
DETAIL-ORIENTED

可靠  
RELIABLE

BRUCE 布鲁斯

就用

布鲁斯

NO THREAD BREAKING, NO STITCH SKIPPING

# CONTENT 目录

## 产品型号一览表 Product List

### 平缝机系列 Lockstitch Machine

02 | **R5E** 步进电脑平缝机  
Computerized Lockstitch Machine With Electronic Control Stitch Length System

03 | **R3** 高速电脑平缝机  
High Speed Computerized Lockstitch Machine

04 | **R2** 三自动电脑平缝机  
Computerized Lockstitch Machine With Three Automatic Functions

05 | **Q5** 全新直驱平缝机  
Power Saving Lockstitch Machine

06 | **R6M** 大空间微油电脑平缝机  
Large Space Semi-dry Lockstitch

07 | **R6-Q** 无线头电脑平缝机  
Thread Cleaness Computerized Lockstitch Machine

08 | **BRC-6390E** 双同步电脑厚料平缝机  
Top & Bottom Feeding Computerized Lockstitch Machine For Heavy-duty

09 | **BRC-8750J** 双针电脑平缝机  
Computerized Double Needle Lockstitch Machine

10 | **BRC-5559G** 侧切刀电脑平缝机  
Semi-dry Computerized Lockstitch Machine With Edge Cutter

11 | **BRC-8558G** 直驱链式平缝机  
Power Saving Chain Stitch Machine

### 包缝机系列 Overlock Machine

12 | **B6** 薄厚可调的电脑包缝机  
Thickness Adjustable Automatic Overlock Machine

13 | **B5** 出活快的电脑包缝机  
High Output Automatic Overlock Machine

14 | **X5S** 薄厚可调的直驱包缝机  
Thickness Adjustable Power Saving Overlock Machine

15 | **X3** 直驱节能包缝机  
Power Saving Overlock Machine

16 | **BRC-5100TDI** 细嘴差动送料直驱包缝机  
Small Cylinder-bed Variable Top Feed Power Saving Overlock Machine

17 | **BRC-5214TE** 差动送料电脑包缝机  
Variable Top Feed Computerized Overlock Machine

### 绷缝机系列 Interlock Machine

18 | **V5** 小方头高速电脑绷缝机  
High Speed Computerized Cylinder-bed Interlock

19 | **P5** 平台式高速电脑绷缝机  
High Speed Computerized Flat-bed Interlock

20 | **BRC-264BDII** 细嘴高速电脑绷缝机  
High Speed Computerized Small Cylinder-bed Interlock Machine

21 | **BRC-009VCDII** 高速电脑多针机  
High Speed Computerized Multi-needle Machine

### 特种机系列 Special Machine

22 | **BRC-T14090** 全自动模板机  
Programmable Electronic Large-area Pattern Sewing Machine

23 | **BRC-T3020** 电脑花样机  
Programmable Electronic Pattern Sewing Machine

24 | **BRC-T5878-68B** 全自动开袋机  
Automatic Pocket Welting Machine

25 | **BRC-T5878-58G** 全自动门襟机  
Automatic Placket Setting Machine

26 | **BRC-T1900G** 高速电脑套结机  
High Speed Bartacking Machine

27 | **BRC-T1790B** 高速电脑平头锁眼机  
High Speed Electronic Lockstitch Buttonholing Machine

28 | **BRC-T781E** 机电一体化平头锁眼机  
Integrated Electronic Lockstitch Buttonholing Machine

29 | **BRC-T1377E** 机电一体化钉扣机  
Integrated Electronic Button Attaching Machine

30 | **BRC-T373E** 机电一体化钉扣机  
Integrated Electronic Button Attaching Machine


31 | **BRC-T9270D/9280D** 机电一体化曲腕机  
Direct Drive Feed-off-the Arm Machine

32 | **BRC-513A** 节能电机  
Power Saving Servo Motor

# 符号解说一览表

## Symbol table

	针送料 Needle Feed		重量 Weight		钮扣直径 Button Diameter		加固线 Safty Stitch
	综合送料 Compound Feed		体积 Volume		钮孔尺寸 Button Hole Size		模式 Mode
	上下送料 Top&Bottom Feed		套结长度 Length of Bar Tacking		循环缝 Cycle Sewing		缝料厚度 Material Thickness
	立式大旋梭 Vertical Hook (Large)		套结宽度 Width of Bar Tacking		记忆功能 Memory Function		针迹长度 Stitch length
	立式标准旋梭 Vertical Hook (Standard)		套结针数 Stitch Number of Bar Tacking		钮扣供给器 Button Provider		自动剪线 Automatic Trimmer
	摆梭 Shuttle Hook		特种剪线 Special Thread Trim		叠布功能 Overlapping Function		转速 Sewing Speed
	卧式标准旋梭 Horizontal Hook (Standard)		特种拨线 Special Thread Wiping		挡线 Thread Wiper		压脚高度 Height of Presser Foot
	卧式大旋梭 Horizontal Hook (Large)		侧切刀功能 Side Cutting Function		开袋尺寸 Pocket Welting Size		差动比 Differential Ratio
	薄料 Thin Material		特种线迹距离 Special Stitch Gauge		裁剪宽度 Cutting Width		针间距 Needle Gauge
	中厚料 Medium-heavy Material		选针齿调节 (锁眼机) Dog Adjusting		轨迹长度 Rail Length		下送料 Bottom Feed
	厚料 Heavy Material		锁眼尺寸(平) Button Holing Size (straight)		针迹长度 Stitch length		弯针 Looper
	自动抬压脚 Auto Matic Presser Lifting		电压 Rating Voltage		功率 Rating Power		频率 Rating Frequency
	钉缝针数 Stitch Number		针迹宽度 Stitch Width		电源 Power		针杆行程 Needle Bar Stroke
	适用范围 Switable Material		先切后缝 Sewing After Cutting		卧式 Horizontal Type		箱体式 Box type
	针数 Needle Number		先缝后切 Cutting After Sewing		摆幅 Sewing range		平板式 Flat-bed
	机针 Needle		电子夹线器 Electronic tension post		针迹长度 Stitch length		筒式 Cylinder type
	离合式机针 Split Needle		压脚交互量 Presses foot working distance		线数 Thread number		平台式 Raised Flat-bed
	自动抬压脚 Presser foot lifter		自动倒缝 Automatic thread trimming		UT装置 UT device		打线凸轮外移 Our moved thread cam

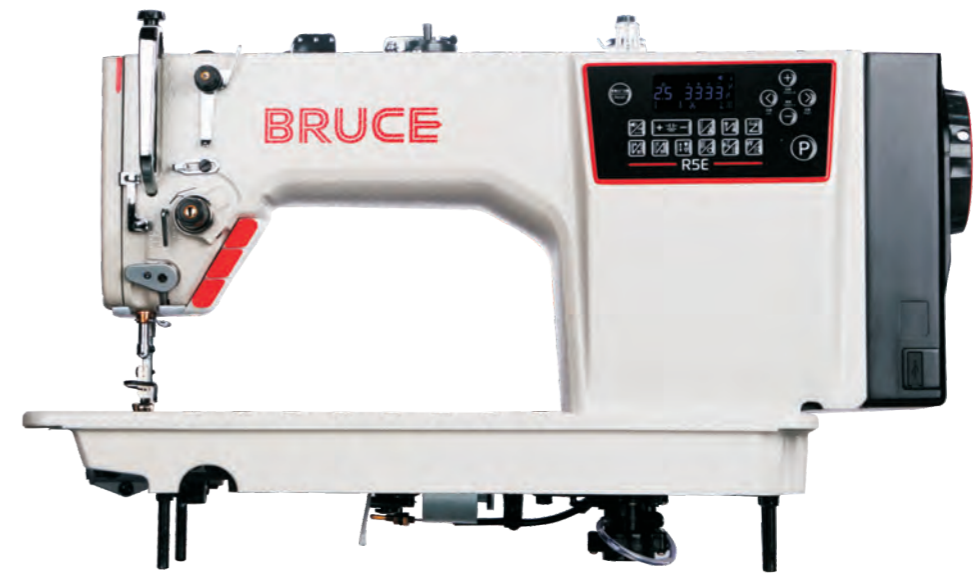


# R5E

品名：步进电脑平缝机  
Computerized Lockstitch Machine With Electronic Control Stitch Length System

特性：线迹精准，倒缝无声，花样线迹  
Precise stitchesilent reverse sewing various stitch



针距精准  
High precision stitch

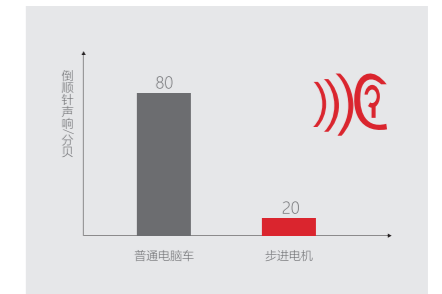

倒缝无声、安静舒适  
Noiseless reverse sewing, quiet and comfortable

## 技术参数 Specification

							A	M	H		
		(mm)	(mm)	(S.p.m)						(mm)	(kg)
R5E-Q	DBx1 11-18#2	2	5	5-13	5000	●	●			695X295X550	41/47
R5E-HQ-M	DBx1 11-18#2	2	5	5-13	5000	●	●			695X295X550	41/47
R5E-HQ	DPx5 18-21#2	2	5	5-13	3500	●	●	●		695X295X550	41/47
R5E-CQP	DBx1 11-18#2	2	5	5-13	5000	●	●			695X295X550	41/47

注 ( Note ) :


标配琦星电控，进口旋梭，自动剪线、自动倒回缝、自动抬压脚、电子夹线功能，5mm针距，可选配7mm针距 (-7)；P为1.6倍旋梭  
Stand configuration is (Qixing) control box .Japanese hook, auto trimmer, auto reverse sewing, auto presser foot lifter, electronic tension post, 5mm stitch length, 7mm stitch length is optional, P means multiples of 1.6 hook




# R3

品名：高速电脑平缝机  
High Speed Computerized Lockstitch Machine

特性：性能稳，易操作，效率高  
Stable, easy operation, high efficiency

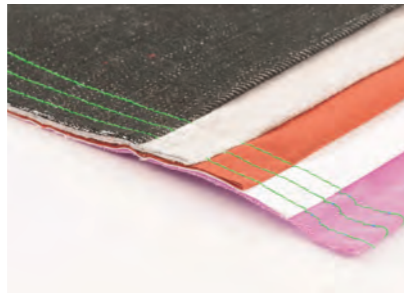

缝薄过厚，性能稳定  
Suitable for light and heavy material  
with stable performance

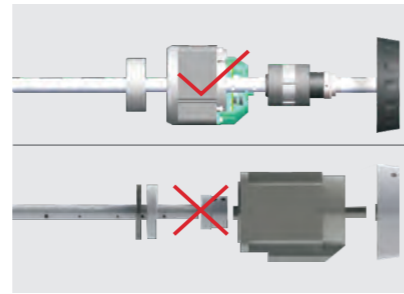

一轴贯通，稳定可靠  
Coaxial driving, stable and reliable

## 技术参数 Specification

Icon	Icon	Icon	Icon (mm)	Icon (mm)	Icon (S.p.m)	A	M	H	Icon (mm)	Icon (kg)
R3-CQ	DB×1 11-18#	2	5	5-13	5000	●	●		660×265×550	39/45.5
R3-CHQ	DP×5 18-21#	2	5	5-13	3500			●	660×265×550	39/45.5
R3-CQ-7	DB×1 11-18#	2	7	5-13	3500	●	●		660×265×550	39/45.5
R3-CHQ-7	DP×5 18-21#	2	7	5-13	3500			●	660×265×550	39/45.5
R3-CHQL-7	DP×5 18-21#	2	7	5-13	3000			●	660×265×550	39/45.5

注 ( Note ) :

- 标配自动剪线、自动倒回缝、自动抬压脚、电子夹线功能。  
Auto thread trimming, auto reverse, auto presser foot lifter and electronic thread tension are equipped as standard.
- A表示薄料, M表示中厚料, H表示厚料。  
A: for light material, M: for medium material, H: for heavy material.


# R2

品名：三自动电脑平缝机  
Computerized Lockstitch Machine With Three Automatic Functions

特性：经济实用、稳定高效  
Economic and practical, efficient and stable



出厂参数，一键复原  
Factory reset

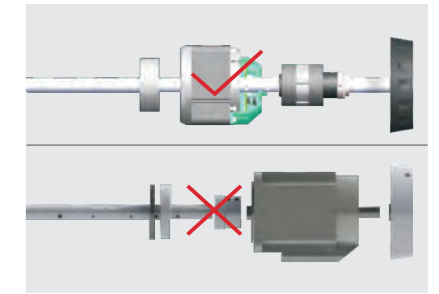

一轴贯通，稳定可靠  
Stable and reliable

## 技术参数 Specification

Icon	Icon	Icon	Icon (mm)	Icon (mm)	Icon (S.p.m)	A	M	H	Icon (mm)	Icon (kg)
R2-CZ	Db×1 11-18#	2	5	5-13	5000	●	●		671×248×550	34/42
R2-CHZ	DP×5 18-21#	2	5	5-13	3500			●	671×248×550	34/42

注 ( Note ) :

- 标配自动剪线、自动倒回缝、自动抬压脚、电子夹线功能。  
Auto thread trimming, auto reverse, auto presser foot lifter and electronic thread tension are equipped as standard.
- A表示薄料, M表示中厚料, H表示厚料。  
A: for light material, M: for medium material, H: for heavy material.




# Q5

品名：全新直驱平缝机  
Power Saving Lockstitch Machine

特性：节能，经久耐用  
Power saving and durable



德国工艺，稳定耐用  
German technology, stable and durable

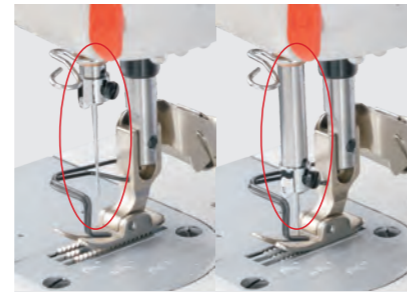

上下停针，自由调节  
Needle position, easy to adjust

## 技术参数 Specification

							A	M	H		NW/GW (kg)
Q5	Dbx1 11-18#	2	5	5-13	5000	●	●			645×248×550	32/39
Q5-H	DPx5 18-21#	2	5	5-13	3500			●		645×248×550	32/39

注 (Note) :  
L为大旋梭。  
L: large hook.


# R6M

品名：大空间微油电脑平缝机  
Large Space Semi-dry Lockstitch

特性：大空间微油  
Large Space Semi-dry



300mm×130mm空间，操作便捷  
300mm×130mm operation space, easy to operate

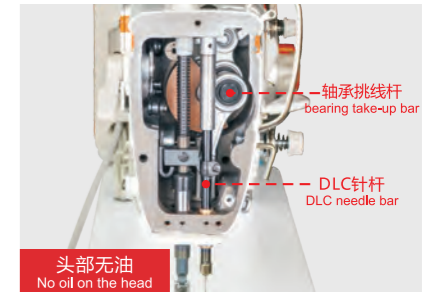

头部无油  
No oil on the head

轴承挑线杆  
Bearing take-up bar

DLC针杆  
DLC needle bar



无油无虑，清洁耐久  
Oil free, clean and durable

## 技术参数 Specification

							A/M	H		NW/GW (kg)
R6M	DBX1 11-18#	2	5	5-13	5000	√			695x315x670	45/52
R6M-N	DBX1 11-18#	2	5	5-13	5000	√			695x315x670	45/52

注 (Note) :


标配自动剪线、自动倒回缝、自动抬压脚、电子夹线功能。  
1. the machine is equipped with auto trimmer, auto bartacking, auto presser footlifter, electronic thread tension .  
N为少鸟巢装置，标配气动吸风装置，选配电动吸风装置。  
2. N is less bird's nest device, R6M-N is equipped with pneumatic suction device, electronic suction is optional.

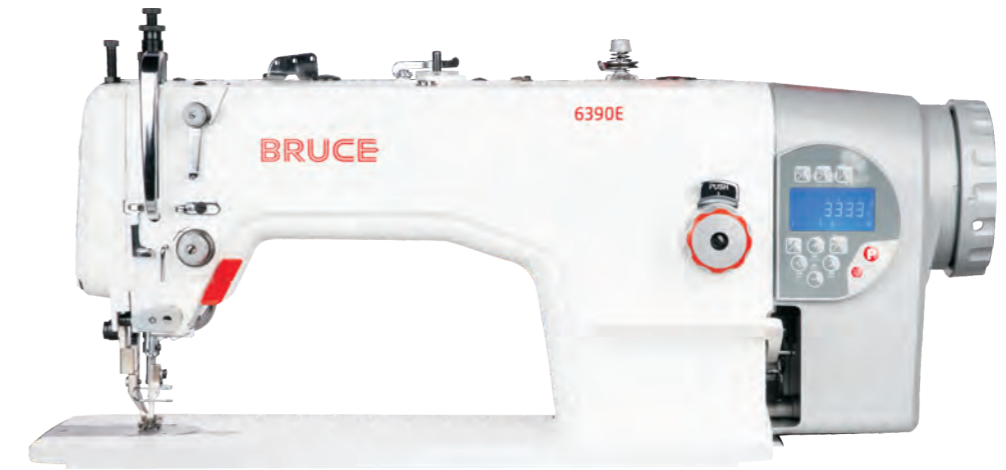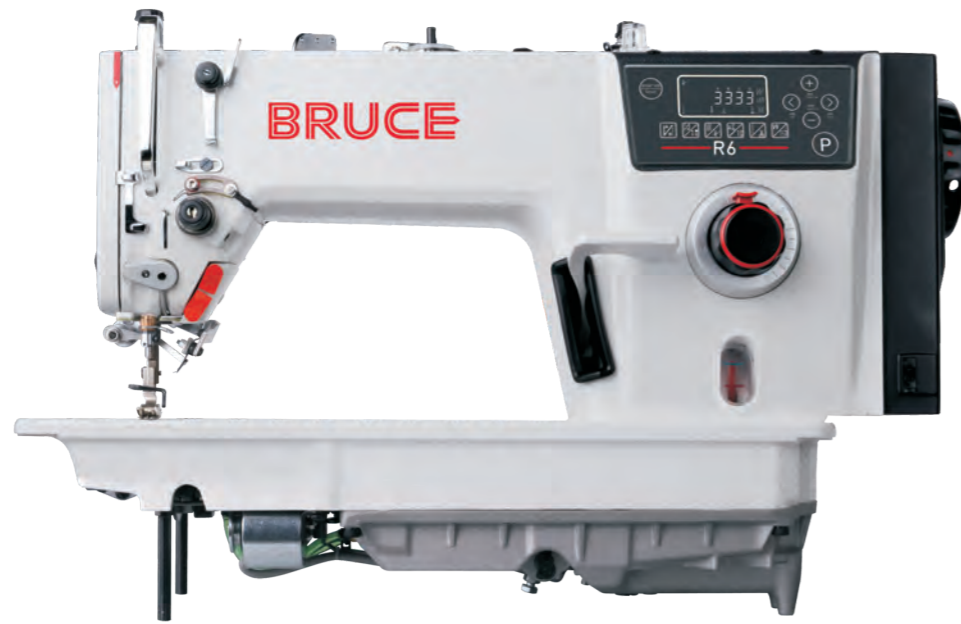


# R6-Q

品名：无线头电脑平缝机  
Thread Cleaness Computerized Lockstitch Machine

特性：双刀短线头  
Double knife movement keeps short remaining thread

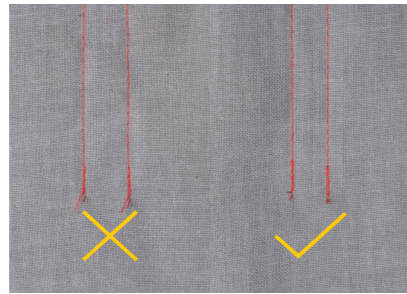

缝后无线头，无需修剪  
Finishing sewing without remaining thread, no need extra trimming

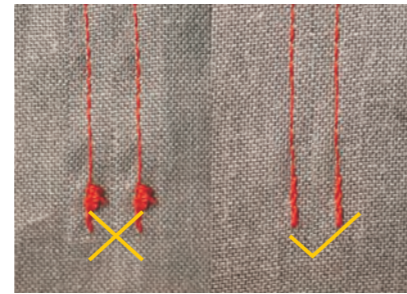

起缝无鸟巢，线迹美观  
Initial sewing without bird nest, beautiful stitch

## 技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	A	M	H	Icon	NW / GW (kg)
		(mm)	(mm)	(S.p.m)					(mm)	
R6-Q	DB×1 11-18#	2	5	5-13	5000	●			645×258×550	40/46
R6-NQ	DB×1 11-18#	2	5	5-13	5000	●			645×258×550	40/46
R6-DNQ	DB×1 11-18#	2	5	5-13	5000	●			645×258×550	40/46

注 ( Note ) :

- 标配自动剪线，自动倒回缝，自动抬压脚，电子夹线功能。  
Auto thread trimming, auto reverse, auto presser foot lifter and electronic thread tension are equipped as standard.
- N: 防小鸟巢装置。RA6-N可选配电动吸风装置，气动吸风装置两种。  
N: Anti-birdnest device. Pneumatic and electronic suction device are optional for RA6-N.

# BRC-6390E

品名：双同步电脑厚料平缝机  
Top & Bottom Feeding Computerized Lockstitch Machine For Heavy-duty

特性：超强吃厚  
For super heavy duty



吃厚8mm皮革  
Capable for 8mm thickness leather



自动剪线，自动抬压脚  
Auto thread trimming and presser foot lifter

## 技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	NW / GW (kg)
		(mm)	(mm)	(S.p.m)		(mm)			
BRC-6390E-CZ-3	常规面料缝制 Normal materials	DPx17 20-23#	2	8	7.5-16	2200	725×285×580	40.5/43	
BRC-6390E-CZST-3	手套专用 Gloves, handbag etc.	DPx5 11-14#	2	8	5-16	1800	725×285×580	40.5/43	
BRC-6390E-CZXB-3	箱包专用 Luggage	DPx17 20-23#	2	8	7.5-16	2200	725×285×580	40.5/43	
BRC-6390E-CZZD-3	座垫转椅专用 Car seat, swivel chair	DPx17 20-23#	2	8	7.5-16	2200	725×285×580	40.5/43	
BRC-6390E-CZ-4	常规面料缝制 Normal materials	DPx17 20-23#	2	8	7.5-16	2200	725×345×580	43/45.5	
BRC-6390B-CZ	常规面料缝制 Normal materials	DPx17 20-23#	2	8	7.5-16	2200	725×285×580	40.5/43	
BRC-6390B-CZ-12	大针距缝制 Sofa, car seat, curtain etc.	DPx17 20-23#	2	12	7.5-16	2200	725×285×580	40.5/43	
BRC-6390B-CZST	手套专用 Gloves, handbag etc.	DPx5 11-14#	2	8	5-16	1800	725×285×580	40.5/43	
BRC-6390B-CZXB	箱包专用 Luggage	DPx17 20-23#	2	8	7.5-16	2200	725×285×580	40.5/43	
BRC-6390B-CZZD	座垫转椅专用 Car seat	DPx17 20-23#	2	8	7.5-16	2200	725×285×580	40.5/43	

注 ( Note ) :

- 6390E为电脑款，标配自动剪线、自动倒回缝、电子夹线功能，可选配自动抬压脚功能(-4)。6390B为直驱款。  
6390E: computerized type, auto thread trimming, auto reverse, electronic thread tension device are equipped as standard, auto presser foot lifter is optional(-4). 6390B: direct drive type.




## BRC-8750J

品名：双针电脑平缝机  
Computerized Double Needle Lockstitch Machine

特性：大空间，适用广  
Large space, wide rang of application



剪粗细线，效果稳定  
Stable trimming for thread of different thickness

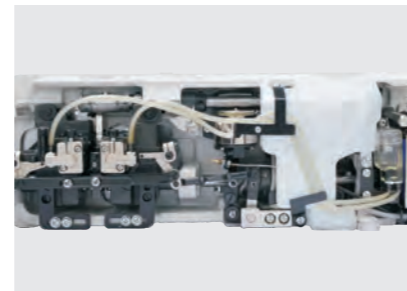

微油润滑  
Semi-dry

### 技术参数 Specification

		(mm)	(mm)	(mm)	(S.p.m)		(mm)	NW/GW (kg)	
BRC-8420J-403E/BRC-8420J-405E	DP×5 11-16#/14-22#	4/5	6.4	7-13	3000		725×320×675	53/63	
BRC-8450J-403E/BRC-8450J-405E	DP×5 11-16#/14-22#	5	6.4	7-13	3000		725×320×675	53/63	
BRC-8450J-413E/BRC-8450J-415E	DP×5 11-16#/14-22#	5	6.4	7-13	3000		725×320×675	53/63	
BRC-8720J-403E/BRC-8720J-405E	DP×5 11-16#/14-22#	7	6.4	7-13	3000	●	725×320×675	53/63	
BRC-8750J-403E/BRC-8750J-405E	DP×5 11-16#/14-22#	7	6.4	7-13	3000	●	725×320×675	53/63	
BRC-8750J-413E/BRC-8750J-415E	DP×5 11-16#/14-22#	7	6.4	7-13	3000	●	725×320×675	53/63	

注 ( Note ) :

- B为直驱款，标配进口旋梭，可选配国产旋梭；  
B is direct drive type. Japanese hook is equipped as standard. Chinese hook is optional.
- E为电脑款：标配自动剪线、自动倒回缝、自动抬压脚、自动拨线功能；可选配电子夹线功能；  
E is computerized type: auto thread trimming, auto reverse, auto presser foot lifter, auto thread wipping are equipped as standard; Electronic thread tension device is optional.
- 电脑款可选针位(针间距mm)Optional needle gauge(for computerized type): 1/8 (3.2)、3/16 (4.8)、1/4 (6.4)、5/16 (7.9)、3/8 (9.5)、1/2 (12.7)、5/8 (15.9)、3/4 (19)、7/8 (22.2)、1 (25.4)；
- 直驱款可选针位(针间距mm)Optional needle gauge(for direct drive type): 1/8 (3.2)、3/16 (4.8)、1/4 (6.4)、5/16 (7.9)、3/8 (9.5)、1/2 (12.7)、5/8 (15.9)、3/4 (19)、7/8 (22.2)、1 (25.4)；
- 003和-403适合缝制薄料，-005和-405适合缝制中厚料。413和415代表自动转角缝。  
-003&-403 suitable for light material,-005&-405 suitable for medium and heavy material,-413&-415:auto coner stitch.
- BRC-8420J和BRC-8720J为直缝，BRC-8450J和BRC-8750J为转角缝。  
BRC-8420J&BRC-8720J are with fixed bar for stright stitch,BRC-8450J&BRC-8750J are with split needle bar for coner stitch.

## BRC-5559G

品名：侧切刀电脑平缝机  
Semi-dry Computerized Lockstitch Machine With Edge Cutter

特性：头部无油，面料品质有保障  
Semi-dry, guarantee clean sewing



切包一体 ( BRC-5558G-T )  
One machine with fabric edge cutter and tape binder functions



头部无油  
Semi-dry

### 技术参数 Specification

		(mm)	(mm)	(mm)	(S.p.m)	A	M	(mm)	NW/GW (kg)		
BRC-5559G-W	DB×1 11-18#	2	5	3.2	5-12	5000	●	645×248×550	32/38.7		
BRC-5558G-W	DB×1 11-18#	2	5	3.2	5-12	4000	●	645×248×550	32/38.7		
BRC-5558G	DB×1 11-18#	2	5	3.2	5-12	4000	●	645×248×550	32/38.7		
BRC-5558G-WT	DB×1 11-18#	2	5	4.8	5-12	4000	●	645×248×550	32/38.7		
BRC-5558G-T	DB×1 11-18#	2	5	4.8	5-12	4000	●	645×248×550	32/38.7		

注 ( Note ) :

- 出厂默认标配同步侧切刀，可选配异步侧切刀，需下单时注明。  
Synchronous side cutter is equipped as standard. Asynchronized side cutter is optional.
- BRC-5559G-W为电脑款，标配自动剪线、自动倒回缝、电子夹线器、自动抬压脚、头部无油；出厂4000转/分，速度在3500-4000转/分为最佳。  
BRC-5559G-W: computerized type, auto thread trimming, auto reverse, auto presser foot lifter and electronic thread tension, semi dry head are equipped as standard. Factory speed: 4000rpm, best working speed: 3500-4000rpm.
  - BRC-5558G为直驱款，出厂3000转/分，速度在3000-3500转/分为最佳。  
BRC-5558G: direct drive type, factory speed: 3000 rpm, best working speed: 3000-3500 rpm.
  - 切包一体只能配置切断宽度3/16，其他可选配切断宽度1/4。  
Fabric cutting width of T type( fabric edge cutter and tape binder) is 3/16, optional width is 1/4.
  - W: 头部无油；T: 切包一体。  
W: semi dry head, T: edge cutter and tape binder functions.






# BRC-8558G

品名：直驱链式平缝机  
Power Saving Chain Stitch Machine

特性：头部无油，面料品质有保障  
Semi-dry, guarantee clean sewing

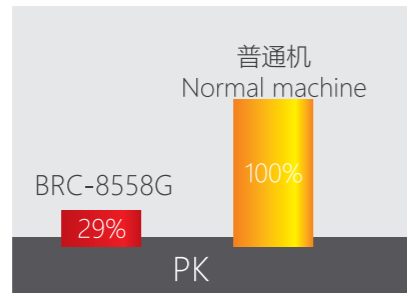

节能高达71%  
Power saving 71%



两种针位组 (BRC-8558G/BRC-8560G)  
Two type of needle gauge set

## 技术参数 Specification


Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
Model	针位	针距	针号	针脚	针脚	针脚	针脚	针脚	针脚	针脚	针脚	针脚	针脚
BRC-8558G-WZ	横双针 Parallel double needle	1/4, 3/16, 1/8, 3/8	TV×7 14#	2	4	1.4-4	5.5	●	●	4000	670×275×595	39/47	
BRC-8558G-1WZ	单针 Single needle	—	TV×7 14#	1	2	1.4-4	5.5	●	●	4000	670×275×595	39/47	
BRC-8558G-2WZ	纵双针 Vertical double needle	3/16	TV×7 14#	2	4	1.4-4	5.5	●	●	4000	670×275×595	39/47	
BRC-8560G-WZ	斜三针 Slant three needle	1/8	TV×7 14#	3	6	1.4-4	5.5	●	●	4000	670×275×595	39/47	
BRC-8560G-WZ-PL	斜三针 Slant three needle	1/8	TV×7 18#	3	6	1.4-4	5.5	●	●	4000	670×275×595	39/47	
BRC-8560G-PHWZ	品三针 Trigonal three needle	1/8	TV×7 21#	3	6	1.4-4	5.5	●	●	4000	670×275×595	39/47	

注 (Note) :  
1、PL-简易后拖轮 W-无油 Z-众邦电控 P- 品三针 H- 厚料。  
PL: rear puller, W: semi dry, Z: zobow control box, P: trigonal three needle gauge, H: heavy material.  
2、T: 自动抬压脚可选配。  
T: auto presser foot lifter is optional.

# B6

品名：薄厚可调的电脑包缝机  
Thickness Adjustable Automatic Overlock Machine

特性：三档可调、线头超短、响应超快  
Suitable for light to heavy duty, Shorter remaining thread, Faster

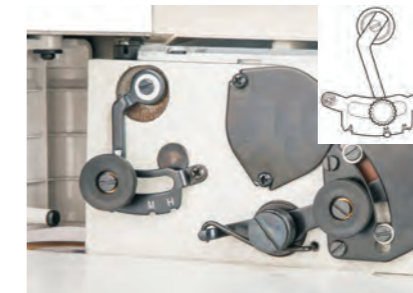

薄中厚可调，适应换季单  
Quick thickness adjustment device more suitable for different seasons



前后短线头、不用修剪  
Short thread, without trimmer

## 技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
Model	包缝	针号	针脚	针脚	针脚	针脚	针脚	针脚	针脚	针脚	针脚	针脚
B6-02×250	包兜缝 Pocket binding seaming	DC×27 14#	2	4	5	—	4	0.7-2	3.5	7000	525×360×510	32.3/40.3
B6-3-02/233	基本缝 Plain seaming	DC×27 11#	1	3	—	4	4	0.7-2	5	7000	525×360×510	32.3/40.3
B6-3-32R2/223	密拷缝 Narrow stitch seaming	DC×27 9#	1	3	—	1.5	4	0.7-2	5	7000	525×360×510	32.3/40.3
B6WF-3-02/213	无纺布 Non-woven fabric	DC×27 14#	1	3	—	4	8.5	—	5.5	7000	525×360×510	32.3/40.3
B6-4-M03/333	基本缝 Plain seaming	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525×360×510	32.3/40.3
B6-4-M03/333/H/M	厚料 Heavy fabric	DC×27 11#	2	4	2	4	4.6	0.7-2	6	7000	525×360×510	32.3/40.3
B6-4-M03/333/AD	宽边可调 Width Adjustable	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525×360×510	32.3/40.3
B6MJ-4-53/233	毛巾缝 Towel specialized	DC×27 11#	2	4	2	4	4	0.7-2	5	7000	525×360×510	32.3/40.3
B6-5-53/233	包条缝 Strip attach seaming	DC×27 14#	2	5	3	5	4	0.7-2	5	7000	525×360×510	32.3/40.3
B6-5-03/233	5×5线迹 5×5 stitch	DC×27 14#	2	5	5	5	4	0.7-2	5	7000	525×360×510	32.3/40.3
B6-5-03/333	3×4线迹 3×4 stitch	DC×27 14#	2	5	3	4	4	0.7-2	5	7000	525×360×510	32.3/40.3
B6-5-A04/435	极厚料 Extra heavy fabric	DC×27 19#	2	5	5	6	5	0.8-1.5	7	7000	525×360×510	32.3/40.3
B6-5-M04/435	牛仔专用 Demin	DC×27 19#	2	5	5	6	5	0.8-1.5	7	7000	525×360×510	32.3/40.3
B6-6-03/333	基本缝 Plain seaming	DC×27 11#	3	6	3×2	4	4	0.7-2	5	7000	525×360×510	32.3/40.3
B6-6-M04/435	牛仔专用 Demin	DC×27 19#	3	6	5×2.5	3.5	5	0.8-1.5	7	7000	525×360×510	32.3/40.3

注 (Note) :  
1、H/M: 薄厚适应性广，选配X (吸风管剪线刀) ;  
H/M: Light and heavy materials are good adaptability;  
2、选配SD (前后气吸装置) , KS: 侧吸切线, KH: 横吸切线, AT: 气动砍刀切线;  
SD is optional(start and end suction device); KS:Vertical suction device; KH: Horizontal suction device;  
3、SD款和气动款的整机体积: 525×360×630 (mm) , 整机重量 33/44 (kg) 。  
Whole volume with SD and KS: 525×360×630 (mm) ; weight :33/44 (kg) .


包缝机系列  
Overlock Machine




# B5

品名：出活快的电脑包缝机  
High Output Automatic Overlock Machine

特性：高效，稳定，耐用  
High efficiency, stable, and durable

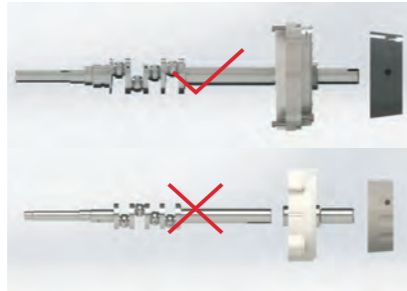

一轴贯通，稳定可靠  
Coaxial driving, stable and reliable

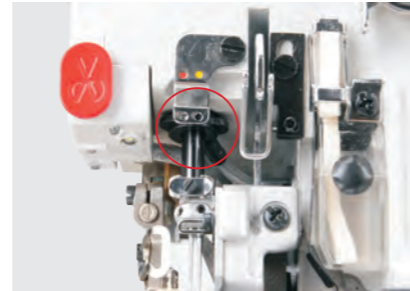

无油无虑，清洁耐久  
Oil free and durable

### 技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	NW/GW (kg)
B5-02×250	包兜缝 Pocket binding seaming	DC×27 14#	2	4	5	—	4	0.7-2	3.5	7000	525×360×510	32.3/40.3
B5-3-02/233	基本缝 Plain seaming	DC×27 11#	1	3	—	4	4	0.7-2	5	7000	525×360×510	32.3/40.3
B5-3-32R2/223	密接缝 Narrow stitch seaming	DC×27 9#	1	3	—	1.5	4	0.7-2	5	7000	525×360×510	32.3/40.3
B5WF-3-02/213	无纺布 Non-woven fabric	DC×27 14#	1	3	—	4	8.5	—	5.5	7000	525×360×510	32.3/40.3
B5-4-M03/333	基本缝 Plain seaming	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525×360×510	32.3/40.3
B5-4-M03/333/H/M	厚料 Heavy fabric	DC×27 11#	2	4	2	4	4.6	0.7-2	6	7000	525×360×510	32.3/40.3
B5-4-M03/333/AD	宽边可调	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525×360×510	32.3/40.3
B5MJ-4-53/233	毛巾缝 Towel specialized	DC×27 11#	2	4	2	4	4	0.7-2	5	7000	525×360×510	32.3/40.3
B5-5-53/233	包条缝 Strip attach seaming	DC×27 14#	2	5	3	5	4	0.7-2	5	7000	525×360×510	32.3/40.3
B5-5-03/233	5×5线迹 5×5 stitch	DC×27 14#	2	5	5	5	4	0.7-2	5	7000	525×360×510	32.3/40.3
B5-5-03/333	3×4线迹 3×4 stitch	DC×27 14#	2	5	3	4	4	0.7-2	5	7000	525×360×510	32.3/40.3
B5-5-A04/435	极厚料 Extra heavy fabric	DC×27 19#	2	5	5	6	5	0.8-1.5	7	7000	525×360×510	32.3/40.3
B5-5-M04/435	牛仔专用 Jeans specialized	DC×27 19#	2	5	5	6	5	0.8-1.5	7	7000	525×360×510	32.3/40.3
B5-6-03/333	基本缝 Plain seaming	DC×27 11#	3	6	3×2	4	4	0.7-2	5	7000	525×360×510	32.3/40.3
B5-6-M04/435	牛仔专用 Jeans specialized	DC×27 19#	3	6	5×2.5	3.5	5	0.8-1.5	7	7000	525×360×510	32.3/40.3


注 (Note) :

- H/M: 薄厚适应性广, 选配X (吸风管剪线刀)。H/M: wide range for light to heavy materials. X: suction cube cutter (for connecting SD device) is optional.
- 选配SD (前后气吸装置), KS: 侧吸切线, KH: 横吸切线, AT: 气动砍刀切线。Optional: SD: start and suction device. KS: vertical pneumatic chain cutter. KH: horizontal pneumatic chain cutter.
- SD款和气动款的整机体积: 525×360×630 (mm), 整机重量 33/44 (kg) Total volume of SD type and pneumatic type: 525×360×630 (mm), total weight :33/44 (kg).


# X5S

品名：薄厚可调的直驱包缝机  
Thickness Adjustable Power Saving Overlock Machine

特性：厚薄随意调、响应效率高  
Thickness adjustable freely, quick response for start-brake

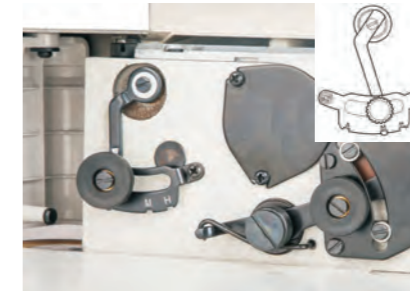

薄厚随意可调，适应范围更广  
Thickness adjustable freely, wider range of adaptation

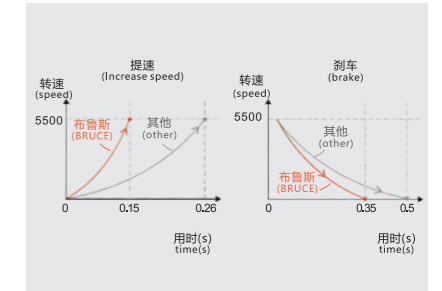

超快起停响应，快速高效  
Super quick response for start-brake, high efficiency

### 技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	NW/GW (kg)
X5S-2	接布机 Fabric joint seaming	11#	1	2	—	6	4	0.7-2	3.5	5500	525×360×510	28/36
X5S-02×250	包兜缝 Pocket binding seaming	14#	2	4	5	—	4	0.7-2	3.5	5500	525×360×510	28/36
X5S-3-02/233	3线基本缝 Plain seaming	11#	1	3	—	4	4	0.7-2	5	5500	525×360×510	28/36
X5S-3-82/233	3线倒回缝 Back latching	11#	1	3	—	4	4	0.7-2	5	5500	525×360×510	28/36
X5S-3-32R2/223	密接缝 Narrow stitch seaming	9#	1	3	—	1.5	4	0.7-2	5	5500	525×360×510	28/36
X5SWF-3-02/213	无纺布 Non-woven fabric	14#	1	3	—	4	8.5	/	5	6500	525×360×510	28/36
X5S-4-M03/333	4线基本缝 Plain seaming	11#	2	4	2	4	4.6	0.7-2	5.5	5500	525×360×510	28/36
X5S-4-M03/333/H/M	4线厚料 Heavy duty	11#	2	4	2	4	4.6	0.7-2	5.5	5500	525×360×510	28/36
X5S-4-83/323	4线倒回缝 Back latching	11#	2	4	2	4	4.6	0.7-2	5.5	5500	525×360×510	28/36
X5SMJ-4-53/233	毛巾机 Towel seaming	11#	2	4	2	4	4	0.7-2	5	5500	525×360×510	28/36
X5S-5-03/333(3×4)	3×4线迹 3×4 Stitch	14#	2	5	3	4	4	0.7-2	5	5500	525×360×510	28/36
X5S-5-03/233(5×5)	5×5线迹 5×5 Stitch	14#	2	5	5	5	4	0.7-2	5	5500	525×360×510	28/36
X5S-5-A04/435	极厚料 Extra heavy duty	19#	2	5	5	6	5	0.8-1.5	7	5500	525×360×510	28/36
X5S-5-53/233	5线包条 Tape attaching seaming	14#	2	5	3	5	4	0.7-2	5	5500	525×360×510	28/36
X5S-5-M04/435	5线牛仔厚料 Especially for denim	19#	2	5	5	6	5	0.8-1.5	7	5500	525×360×510	28/36
X5S-6-03/333	6线基本缝 Plain seaming	11#	3	6	3×2	4	4	0.7-2	5	5500	525×360×510	28/36

注 (Note) :

- H/M: 薄厚适应性广; 选配KS (侧吸) /KH (横吸), 整机体积: 525×360×630 (mm), 整机重量 28/39 (kg)。  
H/M: Suitable for light and heavy; optional device KS (vertical suction device) and KH (horizontal suction device); machine volume: 525×360×630 (mm), machine weight: 28/39 (kg).


包缝机系列  
Overlock Machine




**X3**

品名：直驱节能包缝机  
Power Saving Overlock Machine

特性：高效防油、清洁耐久  
High efficiency, anti-oil, clean and durable

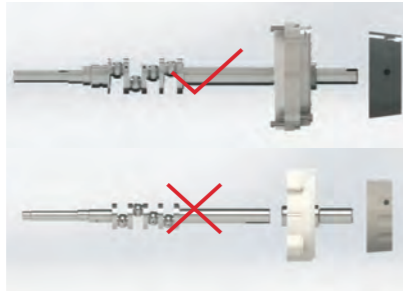

一轴贯通，稳定可靠  
Coaxial driving, stable and reliable

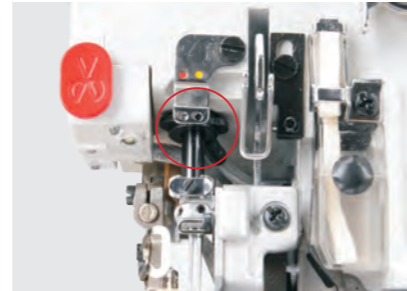

无油无虑，清洁耐久  
Oil free and durable

**BRC-5100TDI**

品名：细嘴差动送料直驱包缝机  
Small Cylinder-bed Variable Top Feed Power Saving Overlock Machine

特性：超小头，高品质，不错位  
Small cylinder bed, avoid of layers offset



超小头148mm，缝制范围广  
148mm small cylinder bed, wide range of application



缝料不错位 (BRC-797T)  
Avoid of layers offset

技术参数 Specification


Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	NW/GW (kg)
X3-3-M1-15	密拷缝 Narrow stitch seaming	9#	1	3	—	1.5	4.6	0.7-2	5.5	5500	495x355x545	28.2/36.7
X3-3-M2-04	基本缝 Plain seaming	11#	1	3	—	4	4.6	0.7-2	5.5	5500	495x355x545	28.2/36.7
X3-3-M5-04/BK	三线倒回缝 Three thread bartack seaming	11#	1	3	—	4	4.6	0.7-2	5.5	5500	495x355x545	28.2/36.7
X3-4-M5-23/BK	四线倒回缝 Four thread bartack seaming	11#	2	4	2	3	4.6	0.7-2	5.5	5500	495x355x545	28.2/36.7
X3-4-M2-24	基本缝 Plain seaming	11#	2	4	2	4	4.6	0.7-2	5.5	5500	495x355x545	28.2/36.7
X3-5-M2-35	3×5 线迹 3×5 stitch	14#	2	5	3	5	4.6	0.7-2	5	5500	495x355x545	28.2/36.7
X3-5-M2-55	5×5 线迹 5×5 stitch	14#	2	5	5	5	4.6	0.7-2	5	5500	495x355x545	28.2/36.7
X3-5x2-56	厚料缝 Heavy fabric	19#	2	5	5	6	5	0.7-2	7	5500	495x355x545	28.2/36.7

技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	NW/GW (kg)
BRC-5104TDI-02/233N	基本缝 Plain seaming	DC×27 11#	1	3	—	4	3.8	0.8-1.8	5	7000	525x360x510	32.3/40.3
BRC-5114TDI-M03/333	基本缝 Plain seaming	DC×27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525x360x510	32.3/40.3
BRC-5114TDI-M03/333/FR01	气动撑开 Pneumatic extension device	DC×27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525x360x630	32.3/40.3
BRC-5114TDI-M03/333/FR02	机械撑开 Mechanical extension device	DC×27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525x360x630	32.3/40.3
BRC-5114TDI-M03/333/KS/FR01	气动撑开、吸风剪线 Pneumatic extension device and thread trimming	DC×27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525x360x630	33/44
BRC-5114TDI-M03/333/KS/FR02	机械撑开、吸风剪线 Mechanical extension device, pneumatic thread trimming	DC×27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525x360x630	33/44
BRC-5114TDI-M03/333/KS/FR05	自动对位、吸风剪线 (机械阀) Auto positioning, pneumatic thread trimming (mechanical valve)	DC×27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525x360x630	33/44
BRC-5114TDI-M03/333/KS/FR06	自动对位、吸风剪线 (电磁阀) Auto positioning, pneumatic thread trimming (magnetic valve)	DC×27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525x360x630	33/44
BRC-5114TDI-M03/333/KS/FR09	全自动上料、吸风剪线 Auto feeding, pneumatic thread trimming	DC×27 11#	2	4	2	4	3.8	0.8-1.8	5.5	7000	525x360x630	33/44

注 ( Note ) :

- 1、细嘴超高速包缝机型号 (非差动款) : BRC-5100DI系列。KS代表吸风剪线抬压脚。  
BRC-5100DI series: small cylinder bed type without variable top feeding. KS: pneumatic thread trimming and presser foot lifting.
- 2、FR01代表气动撑开装置; FR02代表机械撑开装置; FR05代表自动对位、气动撑开 (机械阀控制); FR06代表自动对位、气动撑开 (电磁阀控制); FR09代表全自动上料、自动对位、气动撑开装置。  
FR01: pneumatic extension device, FR02: mechanical extension device, FR05: auto positioning, pneumatic extension (controlled by mechanical value), PR06: auto positioning, pneumatic extension ( controlled by magnetic value), FR09: auto fabric feeding, auto positioning, pneumatic extension device.

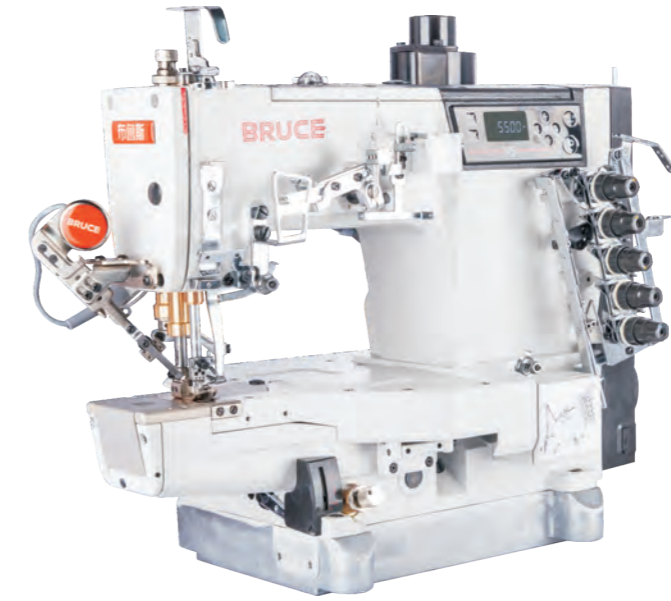

## BRC-5214TE

品名：差动送料电脑包缝机  
Variable Top Feed Computerized Overlock Machine

特性：缝厚强、效率高、不错位  
Capable for heavy duty, avoid of layers offset



缝厚强、效率高、不错位  
Capable for heavy duty, smoothly feeding



自动剪线，防切布  
Auto thread trimmer without cutting fabric

### 技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	NW/GW (kg)
BRC-5214TE-M03/333	基本型 Plain seaming	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	505×360×565	29.2/39.8
BRC-5214TE-A04/435	极厚料 Extra heavy fabric	DC×27 14#	2	4	2	4	7	0.8-1.5	6	6500	505×360×565	29.2/39.8
BRC-3216TE-M03/333	3×4线迹 3×4 stitch	DC×27 14#	2	5	3	4	4	0.7-2	5	7000	505×360×565	29.2/39.8
BRC-3216TE-M03/233	5×5线迹 5×5 stitch	DC×27 14#	2	5	5	5	4	0.7-2	5	7000	505×360×565	29.2/39.8
BRC-3216TE-A04/435	极厚料 Extra heavy fabric	DC×27 19#	2	5	5	6	5	0.8-1.5	7	6500	505×360×565	29.2/39.8

注 ( Note ) :  
上下差动直驱款: BRC-5214TDI系列, 选配X (吸风管剪线刀), 选配SD (前后气吸装置), 整机体积: 505×360×695 (mm), 整机重量29.2/42.8 (kg)。  
BRC-5214TDI series: Variable top feed super high speed direct drive overlock machine. X: suction cube cutter (for connecting SD device) is optional, SD: start and end suction device is optional, total volume: 505×360×695 (mm), total weight: 29.2/42.8 (kg).


## V5

品名：小方头高速电脑绷缝机  
High Speed Computerized Cylinder-bed Interlock

特性：性能稳、速度快、出活多  
Stable performance, high speed, more production



自动剪线，省人省线  
Auto thread trimming

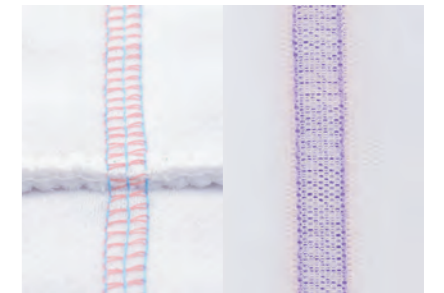

缝薄过厚，线迹美观  
Suitable for light to heavy material with beautiful stitches

### 技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	NW/GW (kg)
V5-UT2-01GB	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62	
V5-UT2-02BB	滚领缝 Tape binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62	
V5-UT2-03GB	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62	
V5-UT2-08AC	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62	
V5-UT2-35AC	下摆折边缝(左刀) Bottom Hemming(left-side cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5000	670×445×720	53/65	
V5-D-01GB	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56	
V5-D-02BB	滚领缝 Tape binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56	
V5-D-03GB	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56	
V5-D-08AC	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56	
V5-D-35AC	下摆折边缝(左刀) Bottom hemming(left-side cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5000	670×445×720	47/59	

注 ( Note ) :  
1、UT2代表电脑车，不标配上剪线刀，D代表直驱机。  
UT2: computerized type without top trimmer, D: direct drive type.  
2、电脑车还可选配UT款，标配上剪线刀。  
UT: computerized type with top and under trimmer.




# P5

品名：平台式高速电脑绷缝机  
High Speed Computerized Flat-bed Interlock

特性：断线停车，底线不缠绕  
Auto stop in case thread breakage, avoid of bottom thread enwinding



断线停车、底线不缠绕  
Auto stop in case thread breakage, avoid of bottom thread enwinding

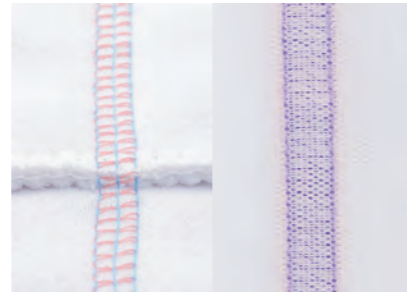

缝薄过厚，线迹美观  
Suitable for light to heavy material with beautiful stitches

## 技术参数 Specification


Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
				(mm)			(mm)	(S.p.m)	(mm)		NW/GW (kg)	
P5-UT2-01GB	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64	
P5-UT2-02BB	滚领缝 Tape binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64	
P5-UT2-03DB	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64	
P5-UT2-08AC	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64	
P5-D-01GB	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58	
P5-D-02BB	滚领缝 Tape binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58	
P5-D-03DB	盖缝 Covering stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58	
P5-D-05CB	缝松紧带(右刀) Elastic lace attaching (right-side cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	4000	670×445×595	48/58	
P5-D-07CB	缝松紧带 Elastic lace attaching	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58	
P5-D-08AC	下摆折边缝 Bottom hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58	
P5-D-23GB	基本缝(大针距) Plain seaming (large stitch length)	UY128GAS 11-14#	3	5	6	5.6/6.4	0.65-1	7	4000	670×445×595	48/58	
P5-D-23BB	滚领缝(大针距) Tape binding (large stitch length)	UY128GAS 11-14#	3	5	6	5.6/6.4	0.65-1	7	4000	670×445×595	48/58	
P5-D-23GBL	基本缝(超大针距) Plain seaming (extra large stitch length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58	
P5-D-23BBL	滚领缝(超大针距) Tape binding (extra large stitch length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58	

注 (Note) :  
1、UT2代表电脑车，不标配上剪线刀，D代表直驱机。  
UT2:computerized type without top trimmer, D: direct drive type.  
2、电脑车还可选配UT款，标配上剪线刀。  
UT:computerized type with top and under trimmer cutter.

# BRC-264BDII

品名：细嘴高速电脑绷缝机  
High Speed Computerized Small Cylinder-bed Interlock Machine

特性：细嘴，稳定，高效  
Small cylinder bed, stable and high efficiency

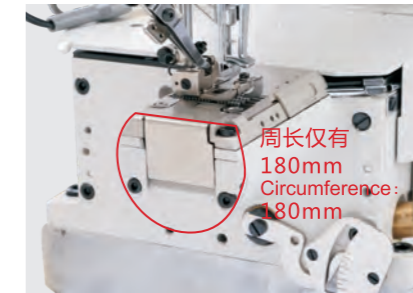

超细嘴180mm，缝制范围广  
180mm small cylinder bed, wide range of application




自动剪线，省人省线  
Auto thread trimming

## 技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
									(mm)	(S.p.m)	(mm)	NW/GW (kg)
BRC-264BDII-01CB/UT	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60	
BRC-264BDII-03FB/UT	盖缝(压扁) Covering stitch(wafered)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60	
BRC-264BDII-03GB/UT	盖缝(单边倒) Covering stitch(side)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60	
BRC-264BDII-08AC/UT	下摆折边缝(窄幅) Bottom hemming(narrow)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60	
BRC-264BDII-08BC/UT	下摆折边缝(宽幅) Bottom hemming(wide)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	680×420×630	50/60	
BRC-264BDI-01CB	基本缝 Plain seaming	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54	
BRC-264BDI-03FB	盖缝(压扁) Covering stitch(wafered)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54	
BRC-264BDI-03GB	盖缝(单边倒) Covering stitch(side)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54	
BRC-264BDI-08AC	下摆折边缝(窄幅) Bottom hemming(narrow)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54	
BRC-264BDI-08BC	下摆折边缝(宽幅) Bottom hemming(wide)	UY128GAS 11-14#	3	5	1.5-3.6	5.6/6.4	0.8-1.4	6.2	4500	630×390×630	42/54	


注 (Note) :  
UT代表电脑; DI代表直驱。  
UT: computerized type (auto presser foot lifter, auto trimming) , DI: direct drive type

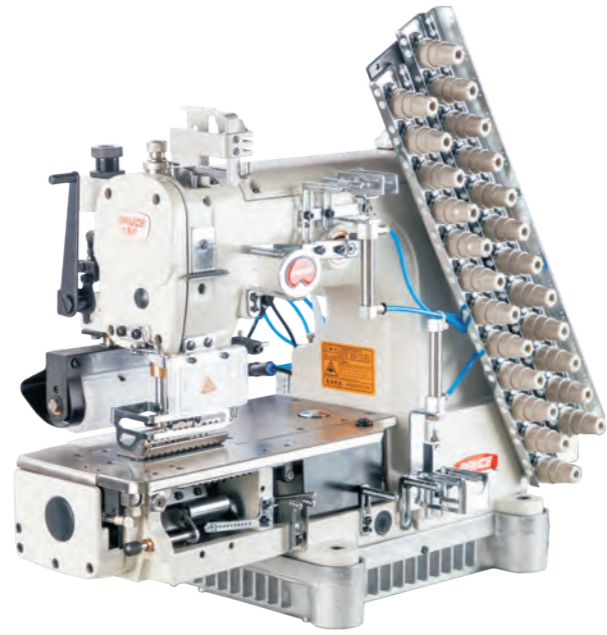


## BRC-009VCDII

品名：高速电脑多针机  
High Speed Computerized Multi-needle Machine

特性：操作便捷，省力，高效  
Easy operation, relaxing working, high efficiency

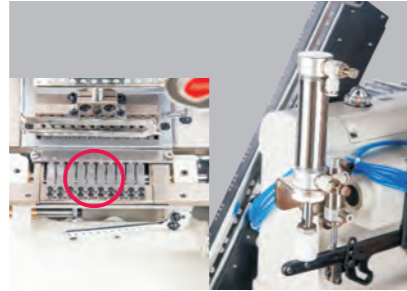

自动剪线，自动抬压脚  
Auto thread trimming, auto presser foot lifter

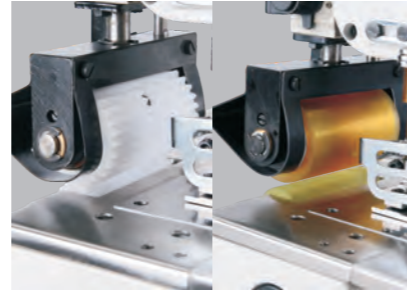

可选配后拖轮，缝薄过厚皆适宜  
Optional puller, capable for light to heavy material

### 技术参数 Specification

Model	Code	Needles	Stitch	Speed (S.p.m)	Table Size (mm)	NW/GW (kg)
BRC-009VCDII	04064P/04080P/04085P/04095P/UTL	UO113 14-16#	4 8	1.7-4.0	6.4/7.9/8.7/9.5	8 3500 615×400×605 52.5/57.5
BRC-009VCDII	06064P/06080P/06095P/UTL	UO113 14-16#	6 12	1.7-4.0	6.4/7.9/9.5	8 3500 615×400×605 52.5/57.5
BRC-009VCDII	08064P/08085P/UTL	UO113 14-16#	8 16	1.7-4.0	6.4/8.7	8 3500 615×400×605 52.5/57.5
BRC-009VCDII	12064P/UTL	UO113 14-16#	12 24	1.7-4.0	6.4	8 3500 615×400×605 52.5/57.5
BRC-009VCDII	13064-32P/UTL	UO113 14-16#	13 26	1.7-4.0	6.4	8 3500 615×400×605 52.5/57.5
BRC-009HF-	04064-254P	TV×5 19-21#	4 8	1.7-4.0	6.4-25.4-6.4	8 3500 615×400×605 52.5/57.5
BRC-009VCDI-	04064P/04080P/04085P/04095P	UO113 14-16#	4 8	1.7-4.0	6.4/7.9/8.7/9.5	8 3500 615×400×605 52.5/57.5
BRC-009VCDI-	06048P/06064P/06080P/06095P	UO113 14-16#	6 12	1.7-4.0	4.8/6.4/7.9/9.5	8 3500 615×400×605 52.5/57.5
BRC-009VCDI-	08032P/08048P/08064P/08085P	UO113 14-16#	8 16	1.7-4.0	3.2/4.8/6.4/8.7	8 3500 615×400×605 52.5/57.5
BRC-009VCDI-	12032P/12048P/12064P	UO113 14-16#	12 24	1.7-4.0	3.2/4.8/6.4	8 3500 615×400×605 52.5/57.5
BRC-009VCDI-	13064-32P	UO113 14-16#	13 26	1.7-4.0	6.4-3.2	8 3500 615×400×605 52.5/57.5
BRC-009VCDI-	17032P	UO113 14-16#	17 34	1.7-4.0	3.2	8 3500 615×400×605 52.5/57.5
BRC-009VCDI-	23032P	UO113 14-16#	23 46	1.7-4.0	3.2	8 3500 615×400×605 52.5/57.5
BRC-009VCDI-	25032P	UO113 14-16#	25 50	1.7-4.0	3.2	8 3500 615×400×605 52.5/57.5

注 ( Note ) :

- UTL代表电脑车  
UTL: computerized.(max, thread trimmer: 10sets)
- 可选附加装置: P (齿状拖轮)、PR (光滑拖轮)、VWL (前松紧带送带装置)、VPL (贴条带车缝)、VSF (门襟车缝)、VPQ (松紧带抽皱缝)。  
Optional device: P (gear puller), PR (flat puller), VWL (front elastic band Attaching), VPL (tape Attaching), VSF (shirt fronting),VPQ (elastic thread shirring).
- 可选配针位 (mm) : 4针【1/4 (6.4)、5/16 (7.9)、11/32 (8.7)、3/8 (9.5)】; 6针【3/16 (4.8)、1/4 (6.4)、5/16 (7.9)、3/8 (9.5)】; 8针【1/8 (3.2)、3/16 (4.8)、1/4 (6.4)、11/32 (8.7)】; 12针【1/8 (3.2); 3/16 (4.8); 1/4 (6.4)】; 13针【1/8 (3.2)、1/4 (6.4)】。  
Optional needle gauge: 4 needles: 【1/4 (6.4), 5/16 (7.9), 11/32 (8.7), 3/8 (9.5)】, 6 needles 【3/16 (4.8), 1/4 (6.4), 5/16 (7.9), 3/8 (9.5)】, 8 needles: 【1/8 (3.2), 3/16 (4.8), 1/4 (6.4), 11/32 (8.7)】, 12 needles 【1/8 (3.2), 3/16 (4.8), 1/4 (6.4)】, 13 needles 【1/8 (3.2), 1/4 (6.4)】.


## BRC-T14090

品名：全自动模板机  
Programmable Electronic Large-area Pattern Sewing Machine

特性：自动缝制、智能高效  
Automatic sewing, intelligent and high efficiency



适应范围广  
Wide range of application

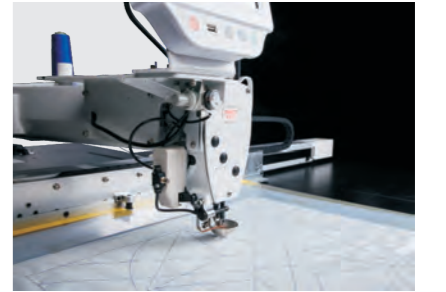


智能精准识别模板  
Intelligent recognition of different templates

### 技术参数 Specification

Model	Code	Needles	Stitch	Speed (S.p.m)	Table Size (mm)	NW/GW (kg)
BRC-T14090A-80SS	(双丝杆X/Y screw rod feeding)	DP×5 8-16#	1 2	1400×800	15 1-5 3000 2440×1340×1420	727/860
BRC-T14090A-81ST	(单丝杆Y screw rod feeding)	DP×5 8-16#	1 2	1400×810	15 1-5 3000 2440×1340×1420	727/860
BRC-T14090C-83TT	(双同步带 synchronous belt feeding)	DP×5 8-16#	1 2	1400×830	15 1-5 3000 2160×1100×1350	527/620

注 ( Note ) :

- 可选配附加装置F10: 自动换梭, F11: 激光切割, F13: 底线检测, F16: 点笔装置, F17 激光净化装置  
Optional devices: F10 : automatic bobbin exchange, F11: laser cutting, F13: bottom thread detection, F16: point pen device. F17: laser cleaning device.

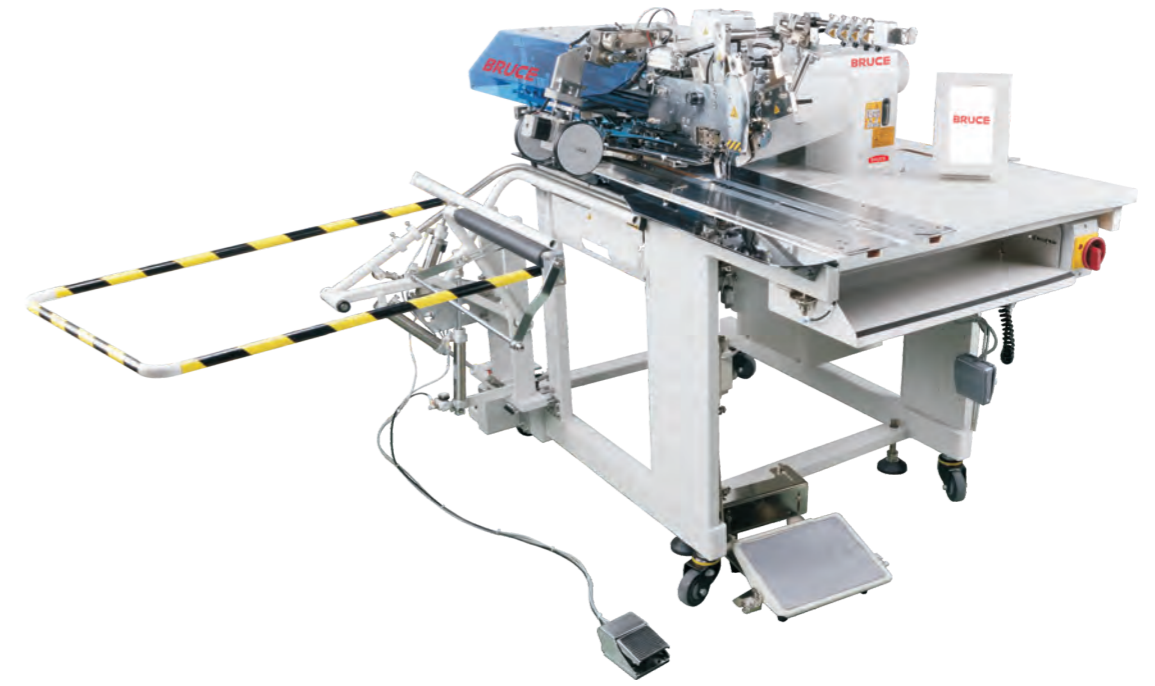


## BRC-T3020

品名：电脑花样机  
Programmable Electronic Pattern Sewing Machine

特性：缝制范围广、吃厚能力强  
Wide range of application, for heavy duty



适应范围广  
Wide range of application

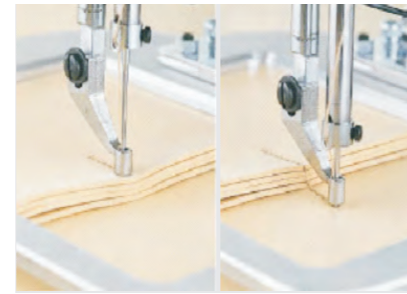

智能中压脚  
Intelligent central presser foot

### 技术参数 Specification


Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
BRC-T1310/1310F1	DP×17 11-25#	1	2	130×100	22	2700	1220×840×1320	140/190	
BRC-T2210/2210F1/2210F3/2210K	DP×17 11-25#	1	2	200×100	22	2700	1220×840×1320	136/186	
BRC-T3020/3020F4/3020K/3020TDB	DP×17 11-25#	1	2	300×200	22	2700	1220×1220×1320	222/288	
BRC-T6040	DP×17 11-25#	1	2	600×400	22	2500	1920×1620×1440	343/479	
BRC-T10040	DP×17 11-25#	1	2	1000×400	22	2500	1920×1620×1440	352/488	

注 ( Note ) :  
1. F1-翻转压脚 (适合机型BRC-T1310、BRC-T2210), F3-侧滑压脚 (适合机型BRC-T2210), K-夹扣装置 (适逢机型BRC-T2210、BRC-T3020), TDB-贴袋缝 (适逢机型BRC-T3020).  
F1: flip presser foot (suitable for BRC-T1310/BRC-T2210), F3: sideslip presser foot (suitable for BRC-T2210), K: clamping device (suitable for BRC-T2210/BRC-T3020), TDB: pocket attaching (suitable for BRC-T3020).  
2. 缝制范围F1是110\*75, F3是180\*80, F4是190\*137, TDB是X方向80-190, Y方向180。  
Sewing range for F1: 110\*75mm, F3: 180\*80mm, F4: 190\*137mm. TDB: X direction 80-190mm, Y direction 180mm.

## BRC-T5878-68B

品名：全自动开袋机  
Automatic Pocket Welting Machine

特性：自动缝制、效率超高  
Automatic sewing, high efficiency

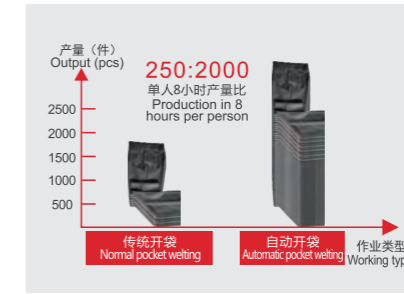

自动化, 高产出  
Automation, high output



适缝口袋  
Suitable for different kinds of pocket

### 技术参数 Specification


Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
BRC-T5878-68B	直袋 Straight pocket	MTx190 14#-18#	2	4	8-20	18-220	3000	1570×1120×1470	277/360
BRC-T5878-78	斜袋 Slant pocket	DPx17 14#-18#	2	4	8-20	18-220	3000	1570×1120×1470	277/360



## BRC- T5878-58G

品名：全自动门襟机  
Automatic Placket Setting Machine

特性：自动缝制、效率超高  
Automatic sewing, high efficiency

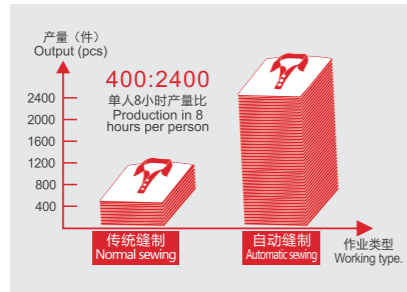

自动化、高产出  
Automation, high output



适应各种门襟缝制  
Suitable for different kinds of placket

### 技术参数 Specification


Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
BRC-T5878-58G	DBx1 11-14# (标配standard 11#)	1	2	1-50	15-260	4000	2040×1050×1580	258/350



## BRC- T1900G

品名：高速电脑套结机  
High Speed Bartacking Machine

特性：一机多用、操作简便  
Multi-functions, easy to operate

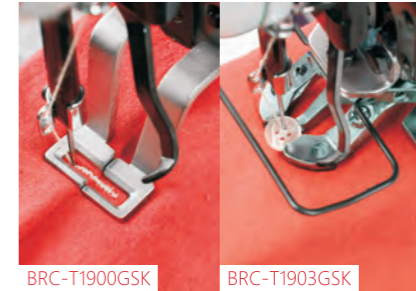

BRC-T1900GSK BRC-T1903GSK

套结/钉扣轻松切换  
Bartacking and button attaching easy to shift



吃厚能力强  
Heavy duty can be sewing smoothly

### 技术参数 Specification

套结系列 ( Bartacking series ) :

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
BRC-T1900GSK	中薄料 Light/medium material	DP×5 16#	1	2	40	30	13	3200	805×405×525	55/64	
BRC-T1900GS	中薄料 Light/medium material	DP×5 16#	1	2	40	30	13	3200	805×405×525	55/64	
BRC-T1900GHK	厚料缝 Heavy material	DP×17 19#	1	2	40	30	13	3200	805×405×525	55/64	
BRC-T1900GH	厚料缝 Heavy material	DP×17 19#	1	2	40	30	13	3200	805×405×525	55/64	
BRC-T1900GSXK	短线头 Short remaining thread	DP×5 16#	1	2	40	30	13	3200	805×405×525	55/64	
BRC-T1900GMK	针织料 Knit material	DP×5 11#	1	2	40	30	13	3200	805×405×525	55/64	
BRC-T1900GM	针织料 Knit material	DP×5 11#	1	2	40	30	13	3200	805×405×525	55/64	
BRC-T1900GMC-D	自动切线并加固 Auto trimming with condense stitch	DP×5 16#	1	2	40	30	13	3200	805×405×525	55/64	
BRC-T1900GY	菊花眼 Cap hole	DP×5 16#	1	2	40	30	13	2700	805×405×525	55/64	
BRC-T1900GN	渔网结 Fishing net	DP×17 19#	1	2	40	30	13	2700	805×405×525	55/64	
BRC-T1900GL	船袜缝 Ankle socks sewing	DP×17 14#	1	2	40	35	13	2000	805×405×525	55/64	
BRC-T1906GS	花样缝 Pattern sewing	DP×17 14#	1	2	60	50	10	2700	805×405×525	55/64	
BRC-T1906GP	拼接缝 Join elastic	DP×17 14#	1	2	60	50	10	2700	805×405×525	55/64	

注 ( Note ) :

标配自动抬压脚、自动剪线、自动扫线功能，带K表示可快速切换套结、钉扣功能，X代表短线头

Auto presser foot lifter, auto thread trimming, auto thread wiping are equipped as standard. K:bartacking&button attaching fast to shift, X: short remaining thread

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
BRC-T1903GSK	钉扣套结互换 Bartacking and button attaching - easy to shift	DP×17 14#	1	2	Φ8-Φ30	X:2.4-6.8, Y:2.4-6.8	10	2700	805×405×525	55/64	
BRC-T1903GS	钉扣机 Button attaching	DP×17 14#	1	2	Φ8-Φ30	X:2.4-6.8, Y:2.4-6.8	10	2700	805×405×525	55/64	
BRC-T1903GR	自动送扣 Auto button feeding	DP×17 14#	1	2	Φ8-Φ20	X:2.4-6.8, Y:2.4-6.8	13	2700	1020×870×1390	131/177	

标配自动抬压脚、自动剪线、自动扫线功能，带K表示可快速切换套结、钉扣功能

Auto presser foot lifter, auto thread trimming, auto thread wiping are equipped as standard, K:bartacking&button attaching fast to shift



特种机系列  
Special Machine




**BRC-  
T1790B**

品名：高速电脑平头锁眼机  
Electronic Lockstitch Buttonholing Machine

特性：头部无油、面料品质有保障  
Semi-dry, guarantee clean sewing



多种花样，选用方便  
Multiple pattern, easy to choose

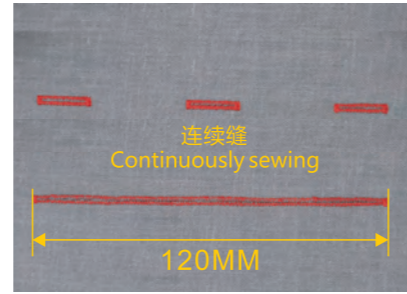

连续缝制，长度可达120mm  
Continuously sewing, max. for 120mm

技术参数 Specification


Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
Model	Material	Stitch	Needle	Stitch Length	Stitch Width	Stitch Depth	Stitch Density	Speed (S.p.m)	Dimensions (mm)	NW/GW (kg)	
BRC-T1790BS-1-D	梭织料 Woven material	25×4	DP×5 12#	1	1/4"~3/4"	2	0.2-2.5	17	4200	780×390×870	56/73
BRC-T1790BS-2-D	梭织料 Woven material	35×5	DP×5 12#	1	1/4"~1"	2	0.2-2.5	17	4200	780×390×870	56/73
BRC-T1790BS-3-D	梭织料 Woven material	41×5	DP×5 12#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	780×390×870	56/73
BRC-T1790BSX-1-D	梭织料短线头 Woven material, short remaining thread	25×4	DP×5 12#	1	1/4"~3/4"	2	0.2-2.5	17	4200	780×390×870	56/73
BRC-T1791BS-D	梭织料 Woven material	70×5	DP×5 12#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	780×390×870	56/73
BRC-T1792BS-D	梭织料 Woven material	120×5	DP×5 12#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	780×390×870	56/73
BRC-T1790BK-1-D	针织料 Knit material	25×4	DP×5KN 11#	1	1/4"~3/4"	2	0.2-2.5	17	4200	780×390×870	56/73
BRC-T1790BK-2-D	针织料 Knit material	35×5	DP×5KN 11#	1	1/4"~1"	2	0.2-2.5	17	4200	780×390×870	56/73
BRC-T1790BK-3-D	针织料 Knit material	41×5	DP×5KN 11#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	780×390×870	56/73
BRC-T1791BK-D	针织料 Knit material	70×5	DP×5KN 11#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	780×390×870	56/73
BRC-T1792BK-D	针织料 Knit material	120×5	DP×5KN 11#	1	1/4"~1 1/4"	2	0.2-2.5	17	4200	780×390×870	56/73

注 (Note) :  
标配自动抬压脚、自动剪线功能，D代表大豪电控，X代表短线头，K代表针织专用。  
Auto presser foot lifter, auto thread trimming are equipped as standard. D: Dahao control box, X: short remaining thread.

**BRC-  
T781E**

品名：机电一体平头锁眼机  
Integrated Electronic Lockstitch Buttonholing Machine

特性：适应范围广，节能高效  
Wide range of application, power saving and high efficiency

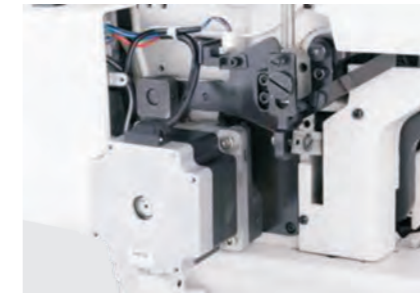


自动抬压脚，自动剪线  
Auto thread trimming and presser foot lifter



直驱一体，节能高效  
Integrated, power saving and high efficiency

技术参数 Specification


Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
Model	Material	Stitch	Needle	Stitch Length	Stitch Width	Stitch Depth	Stitch Density	Speed (S.p.m)	Dimensions (mm)	NW/GW (kg)	
BRC-T781E-Q	梭织料 Woven material	22×4	DP×5 12#	1	1/4"~3/4"	2	● ●	12	3600	685×365×685	46/64
BRC-T782E-Q	梭织料 Woven material	33×5	DP×5 12#	1	1/4"~1"	2	● ●	12	3600	685×365×685	46/64
BRC-T783E-Q	梭织料 Woven material	40×5	DP×5 12#	1	1/4"~1 1/4"	2	● ●	12	3600	685×365×685	46/64
BRC-T781EK-Q	针织料 Knit material	22×4	DP×5 12#	1	1/4"~3/4"	2	● ●	12	3600	685×365×685	46/64

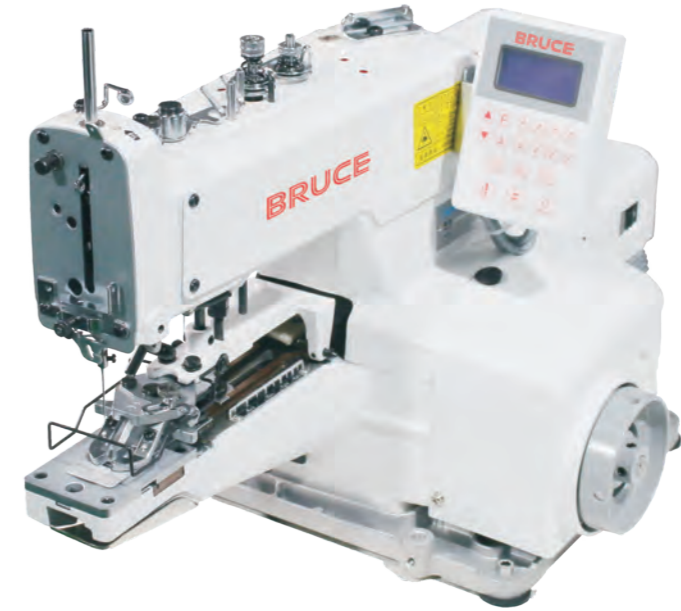

## BRC-T1377E

品名：机电一体钉扣机  
Integrated Electronic Button Attaching Machine

特性：自动切换，节能高效  
Automatic button type shifting, power saving and high efficiency

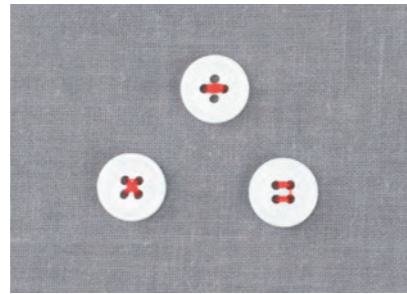

三种花样，随心切换  
Three patterns, easy to shift




直驱一体，节能高效  
Integrated, power saving and high efficiency

## BRC-T373E

品名：机电一体钉扣机  
Integrated Electronic Button Attaching Machine

特性：直驱一体，节能高效  
Integrated, power saving and high efficiency

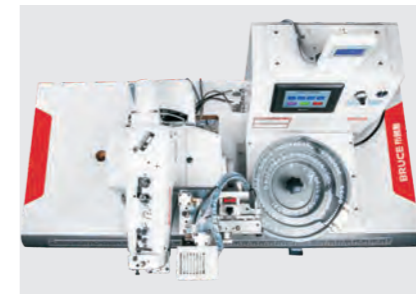

适用多种自动送扣装置 (373ER)  
Suitable to different kind of button feeding device.



直驱一体，节能高效  
Integrated, power saving and high efficiency

### 技术参数 Specification

Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
BRC-T1377E	TQ×1 16#	1	1	10-28	X (2.5-6.5) Y (0.25-4.5)	•	•	9	1500	625×465×440	28.6/34.5

### 技术参数 Specification


Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon	Icon
BRC-T373E	TQ×1 16#	1	1	10-28	X (2.5-6.5) Y (2.5-6.5)	•	•	10	1500	630×470×440	30/45
BRC-T373ER	TQ×1 16#	1	1	10-28	X (2.5-6.5) Y (2.5-6.5)	•	•	13	1500	1220×840×132	146/195(加固)



## BRC- T9270D/9280D

品名：机电一体曲腕机  
Direct Drive Feed-off-the Arm Machine

特性：适应范围广，节能高效  
Wide range of application, power saving and high efficiency

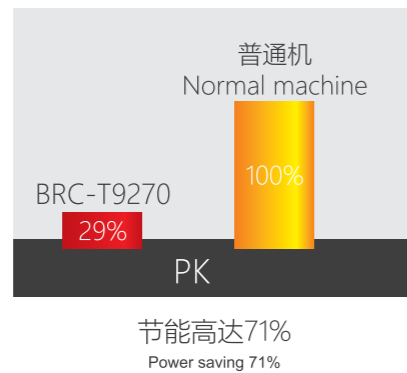

悬臂筒形设计，适用范围广  
Cantilever tube design, wide range of application

### 技术参数 Specification


Model	针距 (mm)	针号	送料 (mm)	压脚 (mm)	针距 (mm)	A	M	H	HH	速度 (S.p.m)	尺寸 (mm)	NW/GW (kg)
BRC-T9270D-12-Q	1/4, 3/16	TV×64 12#	2	4	3.5	8	●			3500	685×535×475	61.5/68.5
BRC-T9270D-12-2PL-Q	1/4, 3/16	TV×64 12#	2	4	3.5	8	●			3500	685×535×475	61.5/68.5
BRC-T9270D-12-2PS-Q	1/4, 3/16	TV×64 12#	2	4	3.5	8	●			3500	685×535×475	61.5/68.5
BRC-T9270D-12-2PL-Q	3/16	TV×64 12#	2	4	4.2	8	●			3500	685×535×475	61.5/68.5
BRC-T9270D-13-Q	1/8	TV×64 12#	3	6	3.5	8	●			3500	685×535×475	61.5/68.5
BRC-T9270D-13-2PL-Q	1/8	TV×64 12#	3	6	3.5	8	●			3500	685×535×475	61.5/68.5
BRC-T9270D-22-Q	1/4, 3/16	TV×64 14#	2	4	3.5	8		●		3500	685×535×475	61.5/68.5
BRC-T9280D-53-Q	1/8	TV×5 21#	3	6	4.2	10		●		3000	685×535×475	61.5/68.5
BRC-T9280D-73-2PL-Q	1/8	TV×5 21#	3	6	4.2	10			●	3000	685×535×475	61.5/68.5
BRC-T9280D-73-PL-Q	1/8	TV×5 21#	3	6	4.2	10			●	3000	685×535×475	61.5/68.5
BRC-T9280D-73-PS-Q	1/8	TV×5 21#	3	6	4.2	10			●	3000	685×535×475	61.5/68.5

注 ( Note ) :

PL-简易后拖轮; PS-外置式后拖轮; BRC-T9270D-12-2PL-Q机型针距4.2mm为雨衣专用机 (普通机型针距为3.5mm).  
PL : rear puller; PS : box puller; BRC-T9270D-12-2PL-Q needle gauge is 4.2mm: for sewing raincoats(3.5mm, normal needle gauge is 3.5mm).

## BRC- 513A

品名：节能电机  
Power Saving Servo Motor

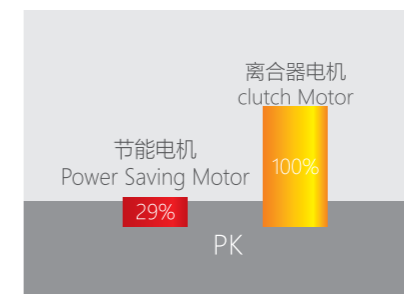

速度可调  
High Speed, rapid Response, High Efficiency

### 技术参数 Specification

Model	电压 (V)	速度 (S.p.m)	扭矩 (Nm)	尺寸 (mm)	NW/GW (kg)
BRC-513A	220V	550V	1-3.5	535x335x195	8.2/10.8
BRC-563A	220V	750V	1-3.5	535x335x195	8.2/10.8

注 ( Note ) :

BRC-513A-1/ 563A-1带外置定位器。  
BRC-513A-1/BRC-563A-1: with external synchronzer.