





B5

High Output Automatic Overlock Machine

High efficiency, stable, and durable

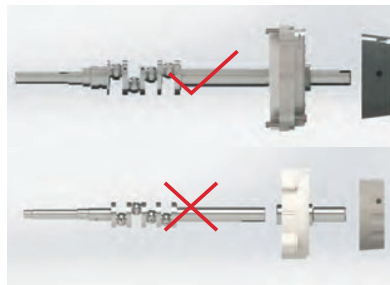



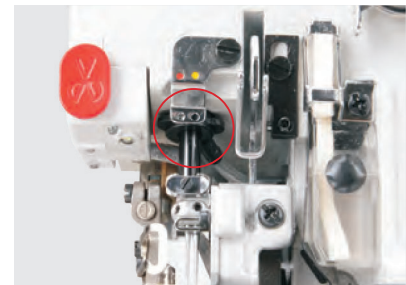









Coaxial driving, stable and reliable



Oil free and durable

Specification

												
					(mm)				(mm)	(S.p.m)	(mm)	NW/GW (kg)
B5-02×250	包兜缝 Pocket binding seaming	DC×27 14#	2	4	5	—	4	0.7-2	3.5	7000	525x360x510	32.3/40.3
B5-3-02/233	基本缝 Plain seaming	DC×27 11#	1	3	—	4	4	0.7-2	5	7000	525x360x510	32.3/40.3
B5-3-32R2/223	密拷缝 Narrow stitch seaming	DC×27 9#	1	3	—	1.5	4	0.7-2	5	7000	525x360x510	32.3/40.3
B5WF-3-02/213	无纺布 Non-woven fabric	DC×27 14#	1	3	—	4	8.5	—	5.5	7000	525x360x510	32.3/40.3
B5-4-M03/333	基本缝 Plain seaming	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525x360x510	32.3/40.3
B5-4-M03/333/H/M	厚料 Heavy fabric	DC×27 11#	2	4	2	4	4.6	0.7-2	6	7000	525x360x510	32.3/40.3
B5-4-M03/333/AD	宽边可调	DC×27 11#	2	4	2	4	4.6	0.7-2	5.5	7000	525x360x510	32.3/40.3
B5MJ-4-53/233	毛巾缝 Towel specialized	DC×27 11#	2	4	2	4	4	0.7-2	5	7000	525x360x510	32.3/40.3
B5-5-53/233	包条缝 Strip attach seaming	DC×27 14#	2	5	3	5	4	0.7-2	5	7000	525x360x510	32.3/40.3
B5-5-03/233	5x5线迹 5x5 stitch	DC×27 14#	2	5	5	5	4	0.7-2	5	7000	525x360x510	32.3/40.3
B5-5-03/333	3x4线迹 3x4 stitch	DC×27 14#	2	5	3	4	4	0.7-2	5	7000	525x360x510	32.3/40.3
B5-5-A04/435	极厚料 Extra heavy fabric	DC×27 19#	2	5	5	6	5	0.8-1.5	7	7000	525x360x510	32.3/40.3
B5-5-M04/435	牛仔专用 Jeans specialized	DC×27 19#	2	5	5	6	5	0.8-1.5	7	7000	525x360x510	32.3/40.3
B5-6-03/333	基本缝 Plain seaming	DC×27 11#	3	6	3×2	4	4	0.7-2	5	7000	525x360x510	32.3/40.3
B5-6-M04/435	牛仔专用 Jeans specialized	DC×27 19#	3	6	5×2.5	3.5	5	0.8-1.5	7	7000	525x360x510	32.3/40.3

H/M: wide range for light to heavy materials. X: suction cube cutter (for connecting SD device) is optional.

Optional: SD: start and suction device. KS: vertical pneumatic chain cutter. KH: horizontal pneumatic chain cutter.