







High Speed Computerized Cylinder-bed **Interlock Machine**



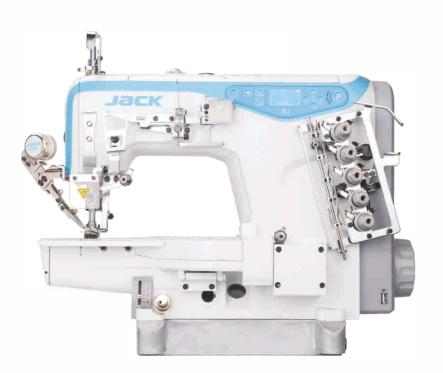




1 Auto Trimming

Easy to operate, learn and use. Auto trimming makes the production efficiency increase by 40%.





2 Suitable For Light And Heavy Material, Beautiful Stitches

Enlarge sewing range; suitable for light and heavy material without deformation during sewing.



3 Voice Guide, Easy To Learn And Use


Problems can be solved according to the detailed and scientific voice guide, also one key reset is available.



4 Oil Proof, High Qualified Products Rate

Needle bar, feed dog, sliding bar are fully lubricated without oil leakage to prevent fabric from oil.









5 One Machine With Multi-functions, Suitable For Different Kinds Of Processes

Four-in- one sewing bed: with functions of tape binding, covering seam, bottom hemming and sewing bed extended to meet different kinds of processes by adding the corresponding optional devices.

Specification

Functions				Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (S.p.m)	Volume (mm)	Weight (kg)
Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	52/62
Bottom Hemming (Left-side Cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5000	670×445×720	53/65
Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5500	670×445×595	46/56
Bottom Hemming (Left-side Cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.8-1.3	7	5000	670×445×720	47/59
	Plain Seaming Tape Binding Covering Stitch Bottom Hemming Bottom Hemming (Left-side Cutter) Plain Seaming Tape Binding Covering Stitch Bottom Hemming Bottom Hemming	Plain Seaming UY128GAS 11-14# Tape Binding UY128GAS 11-14# Covering Stitch UY128GAS 11-14# Bottom Hemming UY128GAS 11-14# Bottom Hemming (Left-side Cutter) UY128GAS 11-14# Plain Seaming UY128GAS 11-14# Tape Binding UY128GAS 11-14# Covering Stitch UY128GAS 11-14# Bottom Hemming UY128GAS 11-14# Bottom Hemming UY128GAS 11-14#	Plain Seaming UY128GAS 11-14# 3 Tape Binding UY128GAS 11-14# 3 Covering Stitch UY128GAS 11-14# 3 Bottom Hemming UY128GAS 11-14# 3 Bottom Hemming UY128GAS 11-14# 3 Plain Seaming UY128GAS 11-14# 3 Tape Binding UY128GAS 11-14# 3 Covering Stitch UY128GAS 11-14# 3 Bottom Hemming UY128GAS 11-14# 3 Bottom Hemming UY128GAS 11-14# 3 Bottom Hemming UY128GAS 11-14# 3	Plain Seaming UY128GAS 11-14# 3 5 Tape Binding UY128GAS 11-14# 3 5 Covering Stitch UY128GAS 11-14# 3 5 Bottom Hemming UY128GAS 11-14# 3 5 Bottom Hemming UY128GAS 11-14# 3 5 Plain Seaming UY128GAS 11-14# 3 5 Tape Binding UY128GAS 11-14# 3 5 Covering Stitch UY128GAS 11-14# 3 5 Bottom Hemming UY128GAS 11-14# 3 5 Bottom Hemming UY128GAS 11-14# 3 5 Bottom Hemming UY128GAS 11-14# 3 5	Plain Seaming UY128GAS 11-14# 3 5 1.5-4.5 Tape Binding UY128GAS 11-14# 3 5 1.5-4.5 Covering Stitch UY128GAS 11-14# 3 5 1.5-4.5 Bottom Hemming UY128GAS 11-14# 3 5 1.5-4.5 Bottom Hemming UY128GAS 11-14# 3 5 1.5-4.5 Plain Seaming UY128GAS 11-14# 3 5 1.5-4.5 Tape Binding UY128GAS 11-14# 3 5 1.5-4.5 Covering Stitch UY128GAS 11-14# 3 5 1.5-4.5 Bottom Hemming UY128GAS 11-14# 3 5 1.5-4.5	No. No. Length (mm) Width (mm)	No. No. Length (mm) Width (mm) Ratio	No. No. Length (mm) Width (mm) Ratio Height (mm)	No. No. Length (mm) Width (mm) Ratio Foot Lifting Height (mm) Height (mm)	No. No. Length (mm) Width (mm) Ratio Foot Lifting (s.p.m) (mm) (mm)

Note: UT: computerized, D: direct drive.