

Excellence in seaming



5622/5626

Double-chainstitch special
high-speed seamer (INLINE)

PFAFF 5622/5626

Areas of application:



5622



5626

| | | |
|---|---|---|
| Automotive interior (dash boards, side covers), airbags | | x |
| Curtains, tents, awnings | x | |
| Jeans, work wear, sports wear, casual wear | x | x |

Features:

| | | |
|--|---|---|
| Very high stitch quality for top stitching and decorative seams in visible areas | x | x |
| The hooks are arranged parallel to each other and work in the seam line (INLINE) | x | x |
| Precise and even stitch setting on all materials | x | x |
| Simple threading, owing to swing-out loopers. All threading points are accessible from the front of the machine | x | x |
| Automatic presser foot lift (pneumatically controlled) with tension release | x | x |
| Can be equipped with up to 10 needles next to each other | x | x |
| Other needle gauges and seam constructions are possible by conversion: - largest gauge between outermost needles 60 mm - smallest gauge between two needles 4.8 mm | x | x |
| By exchanging attachments or part sets the machine can be adapted to suit individual needs | x | x |
| The construction is suitable for table height and standing installation | x | x |
| High traction due to unison feed (bottom feed and alternating top and needle feed) | | x |
| Optional puller to support the feed of the material | x | |
| Pneumatically controlled seam center guide for exact decorative seams (double-needle) | | x |


Special versions:

Double- or 3-needle machine with 3.2 mm needle gauge:

Neat and parallel seams are guaranteed when sewing small radii!




Optional puller for single- and multi-needle machines

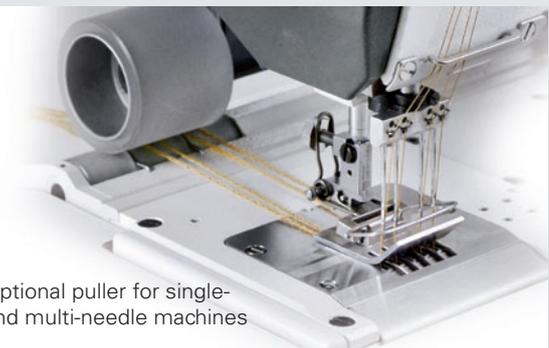

Part sets:

| | | |
|----------|---------------------|--------------------------------------|
| a | Number of needles: | 1 - 10 needles |
| b | Needle gauges: | 4.8 mm, 6.4 mm (others upon request) |
| c | Sewing area (max.): | 60 mm |

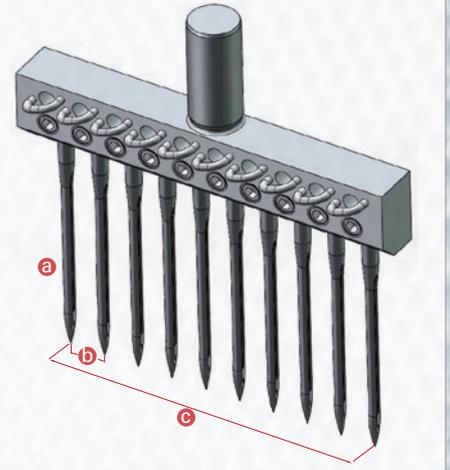


Operation examples:



Double-needle top-stitching work on seat plates



Attaching and top-stitching of jeans waistbands

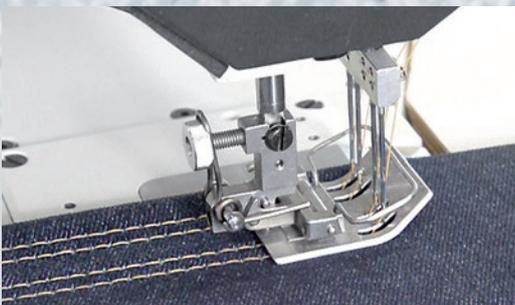

4-needle top-stitching work on jeans trousers



Single-needle fancy seams on dash boards

Technical Data:

Stitch type:

401 (Double-chain stitch)

Sewing speed (max.):

3,600/min (depending on needle gauge and material)

Stitch length (max.):

6.0 mm

Needle gauge:

4.8 - 60 mm (3.2 mm on request)

Clearance under the sewing foot:

11 mm

Top-feed stroke (only 5626):

7 mm

Needle system:

62-57

Thread size (max.):

11/3

Needle size:

100 - 140

Machine clearance:

255 x 112 mm

Motor:

PFAFF P40 CD: 500 W

Carton dimensions:

77 x 62 x 38 cm

Bedplate dimensions:

476 x 177 mm

Net weight (sewing head):

approx. 56 kg

Weight (sewing head in carton):

approx. 64 kg

**PFAFF Industriesysteme und Maschinen GmbH**

Hans-Geiger-Str. 12 – IG Nord

D-67661 Kaiserslautern

Telefon: +49-6301/3205-0

Telefax: +49-6301/3205-3171

E-mail: info@pfaff-industrial.com

Website: www.pfaff-industrial.com